



INERCO 

FLEXICOM-LNB


**Combustion Technology for Low
NO_x Operation and Improved Boiler
Performance**

www.inercoetech.com
www.inerco.com




General overview

- FLEXICOM-LNB: ability to regulate burner use for most favorable “in-furnace fire distribution”
- Continuous and steady combustion process operation can be maintained within a defined area avoiding unwanted scenarios promoted by the unavailability of mills, such as “burner gap” which leads to increased NO_x and carbon-in-ash
- Retrofit of the combustion system consists of mechanical changes in the pulverized fuel conveying system:
 - Substitution System: steady air/fuel supply regardless of mill in service (minimization of NO_x, CO, carbon-in-ash and heat rate, increased flexibility for mill maintenance)
 - Addition System: maximum stratification (minimum NO_x without the increase of flue gases temperature)

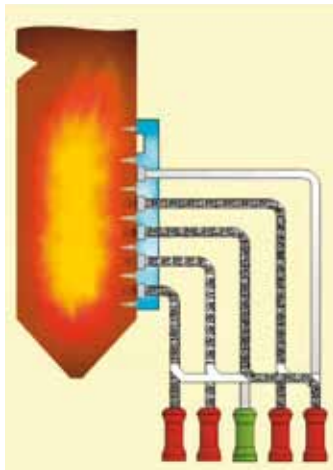

SUBSTITUTION

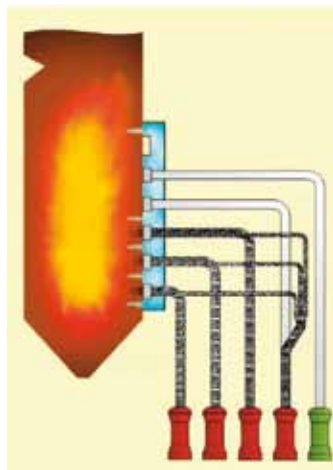

ADDITION

Applications

- Heat rate optimization by controlling steam and flue gas temperatures and minimizing carbon-in-ash
- NO_x reduction through application of enhanced combustion conditions (without detrimental effects)
- Reduction of SCR/SNCR capital and operating costs:
 - Typical savings in capital costs: 6 - 8% (catalyst volume, reagent storage plant size)
 - Typical savings in operating costs: > 30% (catalyst replacement, NH₃ reagent consumption)
- Optimization of boiler/milling system availability, operation flexibility and maintenance
- Fuel use optimization: poor quality or difficult fuels, co-firing
- Increased potential for NO_x reduction through reburning and ammonia/urea injection
- Cost-effective reduction of mercury emissions by means of improved combustion tunings



Competitive advantages

- Cost-effective solution for NO_x reduction compatible with enhanced process safety, availability and efficiency
- Maximum fuel and air stratification avoiding increases in carbon-in-ash, radiant SH surface temperature, SH steam temperature, flue gas temperature
- Parallel increase in boiler and milling system operating flexibility
- Versatile technology to simultaneously address different targets: heat rate, emissions and/or operational constraints
- System design and start-up under NFPA-85 regulations
- Short boiler outage



Typical ROI periods as low as 1 – 2 years



Executive summary

- FLEXICOM-LNB, retrofit of coal pipe layout to:
 - Reduce SCR/SNCR capital and operating costs
 - Improve heat rate and minimize carbon-in-ash
 - Minimize NO_x emissions by primary measures (fuel and air staging)
 - Enable the use of lower quality fuels
 - Control mercury emissions
- NO_x generation and combustion efficiency unaffected by change of mills in operation
- Avoidance of typical fuel and air staging collateral problems such as increased carbon-in-ash, corrosion, steam and tube temperatures, flue gas heat losses, etc.
- Advantages of implementing FLEXICOM-LNB:
 - Cost-effective solution for NO_x reduction
 - Improved overall performance and operating flexibility and safety
 - Versatile application to multiple objectives





Our clients

GAS AND ELECTRICITY

Abelló Linde - AGA - Air Liquide - Alstom - BP Solar - CENER - CFE - Colbún - E.ON - EDF - EDP - Elcogas - Emgesa - Enagas - Endesa - Endesa Ireland - EnergieKontor - E.ON France - E.ON Italia - EVN - Gas Natural - GDF Suez - HidroCantábrico - Iberdrola - Intergen - Linde Gas - MedGaz - Pegop - Praxair - Promigas - PKE Polska - Reganosa - Saggas - Scottish Power - Viesgo

HYDROCARBONS

Agencia Nacional de Hidrocarburos de Colombia - Asociación Colombiana del Petróleo - Atofina - Baker Hughes - Bhp Billiton - BP - Cepsa - CLH - Conoco Philips - Ecopetrol - Exxon Mobil - Mansarovar Energy Colombia - Petro Santander Colombia - Petróleos de Venezuela - Petrolifera Petroleum - Petronor - Repsol - Sonatrach

CHEMICAL AND PETROCHEMICAL

BASF - Biofilm - Brenntag - Brinsa - Dow Chemical - ENCE - Ercros - Erkol - Ferial - FMC Foret - Huntsman Tioxide - MAXAM - Mexichem - Oiltanking - Propilco - Rhodia - Solvay - UBE - Vordian

MINING

Bhp Billiton - Boliden - Catalina Huanca Sociedad Minera - Cerro Matoso - CLC - Glencore - Los Quenuales - Matsa - Perubar

CEMENT AND STEEL

Aceralia - Acerinox - Argos - Atlantic Copper - Cementos Portland - Cemex - Cimpor - EADS - Holcim - IZAR - Lafarge Asland - Malpesa - Titan America / Separation Technologies - UNESID - Xstrata Zinc - Zinsa

ENGINEERING COMPANIES AND INFRASTRUCTURES

Abengoa - Acciona - Conalvías - Duro Felguera - Elecnor - FCC - Fluor - Foster Wheeler - Gamesa - General Electric - Inabensa - Intecs-Inarsa - Isolux Corsán - Lima Ingeniería y Construcción - OHL - Opain - Sener - Soluziona - Technip - Técnicas Reunidas - Vicon

Main Offices



In Partnership with GP Strategies

USA and Canada

INERCO Energy Technologies, Inc.

25 Northpointe Parkway, Suite 100, Amherst, NY 14228

Phone: +1 716 799 1063

Mobile: +1 610 442 5930

Fax: +1 716 799 1081

- Enrique Bosch - EnriqueBosch@inercoetech.com
- John Sale - JohnSale@inercoetech.com
- Barton Hoffman - BHoffman@gpstrategies.com

Latin America

INERCO

Carrera 47ª No. 91-92 La Castellana, Bogotá D.C. Colombia

Phone: +571 236 26 00 - Fax: +571 236 26 00

C/ Julio Verne 114-118, Urbanización Bartolomé Herrera, San Miguel, Lima. Perú

Phone: +511 628 40 00 - Fax: +511 628 94 17

- Francisco Hoces - fjhocesmoral@inerco.com
- Miguel Morales - mmorales@inerco.com

Europe and other territories

INERCO

PT Isla de la Cartuja, C/ Tomas Alba Edison, 2, 41092 Sevilla. Spain

Phone: +34 954 468 100

Fax: +34 954 461 329

- Francisco Rodríguez - frdriguez@inerco.com
- Miguel Morales - mmorales@inerco.com